



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

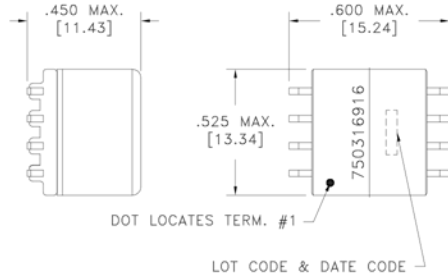


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

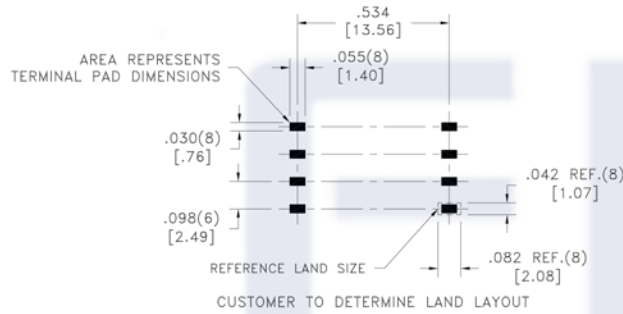

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-2 @20°C	0.190 ohms ±10%
D.C. RESISTANCE	6-7 @20°C	1.15 ohms ±10%
INDUCTANCE	3-2 10kHz, 100mVAC, Ls	94.0uH ±10%
SATURATION CURRENT	3-2 20% rolloff from initial	1.5A
LEAKAGE INDUCTANCE	3-2 tie(6+7), 100kHz, 100mVAC, Ls	4.8uH typ., 9.6uH max.
DIELECTRIC	2-7 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(6-7):(3-2)	2.2:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:
 - Functional insulation for a primary circuit at a working voltage of 265Vrms, 400Vpeak, Overvoltage Category II.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0328		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750316916
6A	8/18		CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750316916	SPECIFICATION SHEET 1 OF 1