
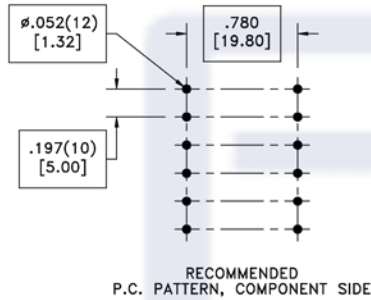



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

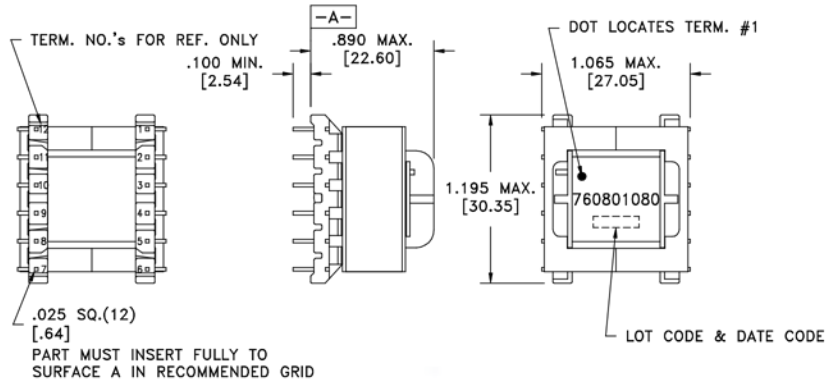

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-5 @20°C	1.60 ohms ±10%
INDUCTANCE	2-5 10kHz, 100mVAC, Ls	2.00mH ±10%
SATURATION CURRENT	20% rolloff from initial	2.6A

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.



Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0622		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE INDUCTOR	PART NO. FKS760801080
6A	9/11			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS760801080	SPECIFICATION SHEET 1 OF 1