


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID
 $\phi.031(12)$
 [.80]

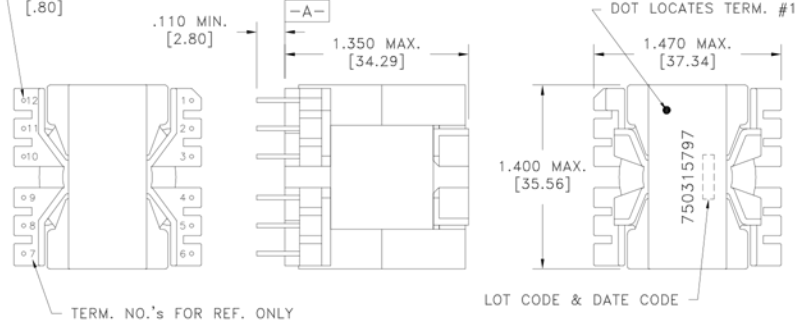



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-6 tie(1+2+3, 4+5+6), @20°C	0.170 ohms ±10%
INDUCTANCE	1-6 tie(1+2+3, 4+5+6), 10kHz, 100mVAC, Ls	350uH ±10%
SATURATION CURRENT	1-6 tie(1+2+3, 4+5+6), 20% rolloff from initial	15A

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

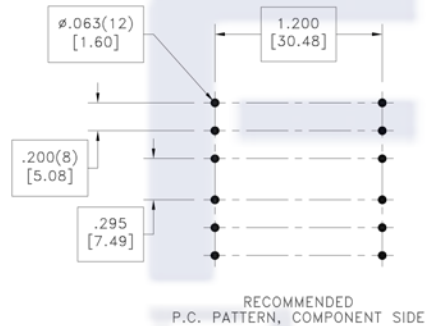

Customer to tie terminals 1&2&3 and 4&5&6 on PC board.

Application of the transformer allows for the leadwires between terminals 1&2&3 and 4&5&6 to solder bridge.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0825		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. FKS750315797
6A	9/16		CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750315797	SPECIFICATION SHEET 1 OF 1