



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

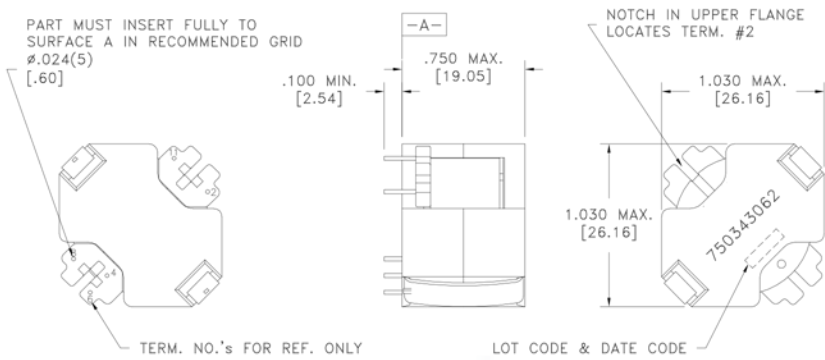

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	4-6 @20°C	0.195 ohms max.
D.C. RESISTANCE	8-11 @20°C	0.174 ohms max.
INDUCTANCE	4-6 20kHz, 100mVAC, Ls	330.0uH ±5%
SATURATION CURRENT	4-6 20% rolloff from initial	5A
DIELECTRIC	4-8 1500VDC, 1 second	-
URNS RATIO	(4-6):(8-11)	9.38:1, ±2%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

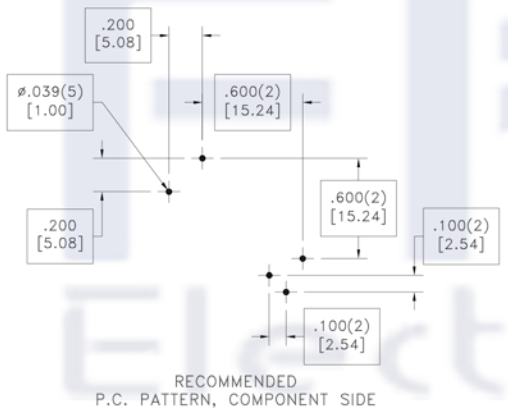

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0239		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE INDUCTOR	PART NO. FKS750343062
6A	1/16		CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750343062	SPECIFICATION SHEET 1 OF 1