



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

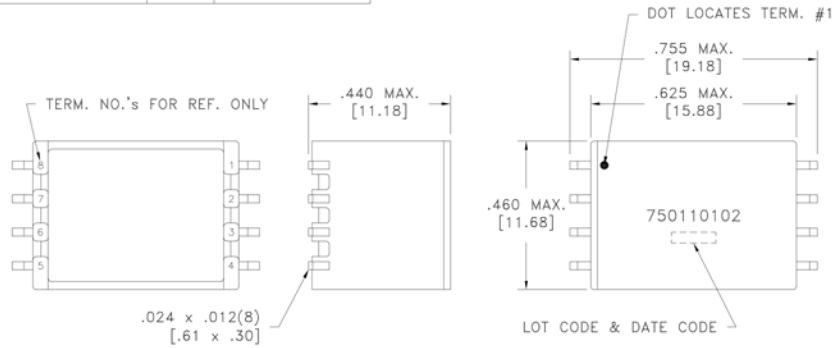

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	1.20 ohms max.
D.C. RESISTANCE	8-5 @20°C	1.20 ohms max.
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	60uH min.
DIELECTRIC	1-8 8.75kVAC, 1 second	7kVAC, 1 minute
URNS RATIO	(1-4):(8-5)	1.08:1, ±2%

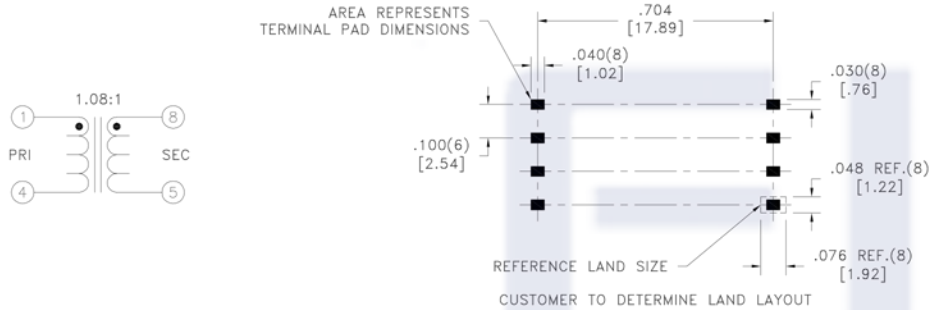

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to meet EN50470-1, Class II, <300V, reinforced insulation.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>FKS750110102</b>
6D	4/19	Method: Tape & Reel				
6C	4/13	PKG-0892	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750110102		SPECIFICATION SHEET 1 OF 1
6B	1/13					
6A	11/12					