


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
	Sn100%	No	No
LF3	Sn100%	Yes	Yes

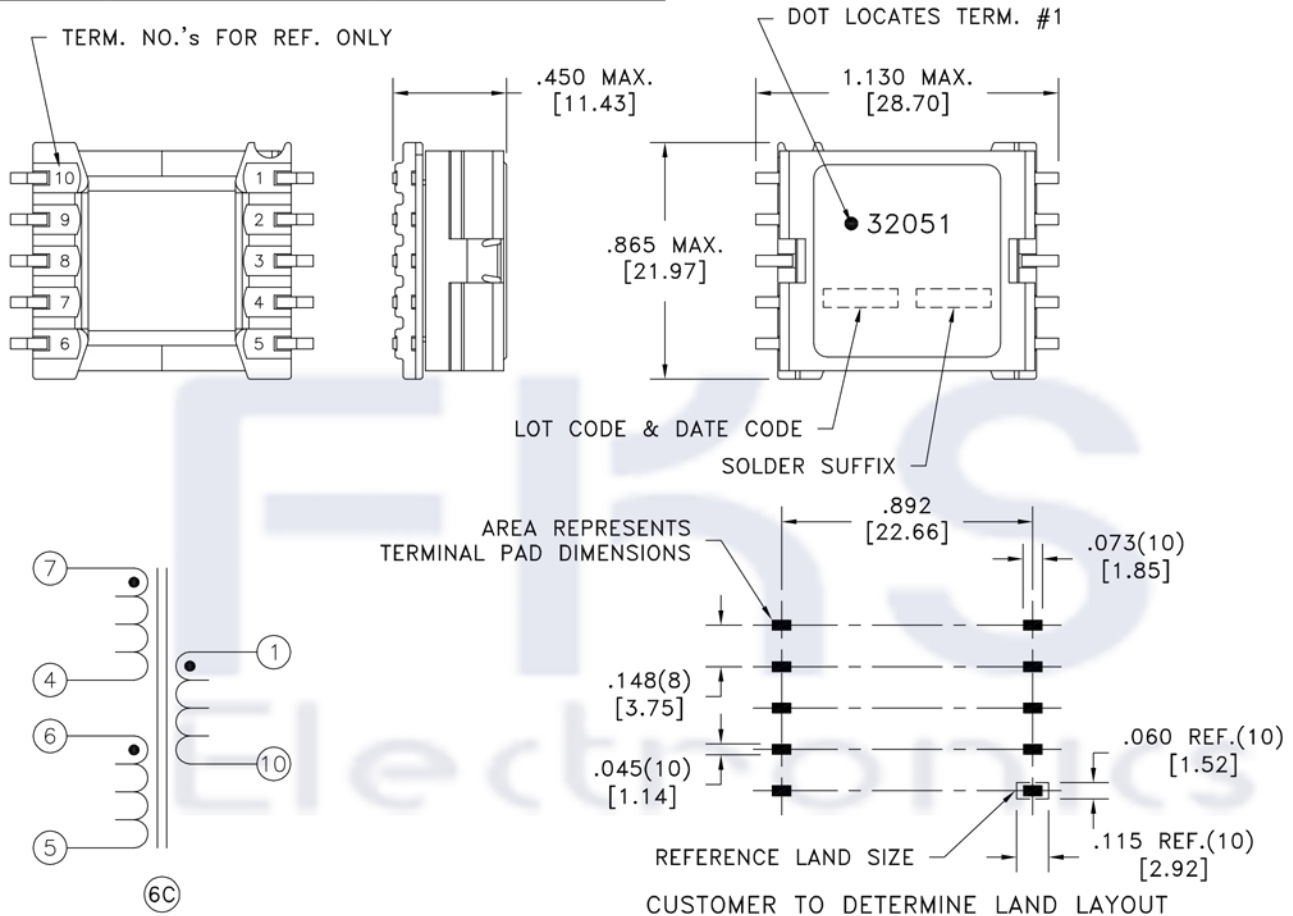

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

- ⑥C D.C. RESISTANCE (@20°C): 5-6, 0.030 ohms max.  
1-10, 0.70 ohms max.
- ⑥C 4-7, 0.030 ohms max.
- DIELECTRIC RATING: 1000VDC, 1 minute tested by applying 1250VDC for 1 second between 1-6(tie 4+5).
- ⑥C 500VDC, 1 minute tested by applying 625VDC for 1 second between 4-5.
- INDUCTANCE: 10.0uH ±10%, 10kHz, 100mVAC, 5-6(tie 4+5, 6+7), Ls.
- LEAKAGE INDUCTANCE: 0.05uH max., 100kHz, 10mAAC, 5-6(tie 1+10, 4+5, 6+7), Ls.
- ⑥C TURNS RATIO: (1-10):(6-5) = 10:1, ±2%.
- ⑥C (1-10):(7-4) = 10:1, ±2%.
- ⑥B OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Midcom p/n 32051R-LF3 is eiSos p/n: 750032051.

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE		PART NO.	REV.
	<b>TRANSFORMER</b>			
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750032051		<b>6C</b>	<b>3/13</b>
	SPECIFICATION SHEET 1 OF 1			