
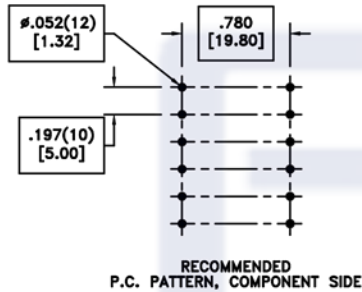



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

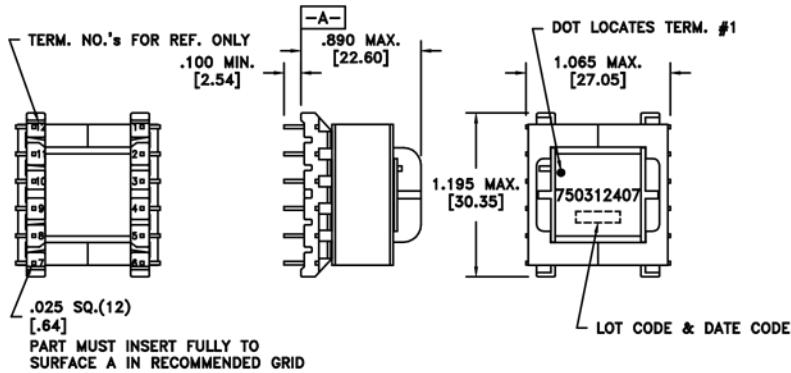

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-5 @20°C	1.35 ohms ±10%
D.C. RESISTANCE	9-11 @20°C	0.105 ohms ±10%
INDUCTANCE	2-5 10kHz, 100mVAC, Ls	1.10mH ±10%
SATURATION CURRENT	20% rolloff from initial	4.0A
LEAKAGE INDUCTANCE	2-5 tie(9+11), 100kHz, 100mVAC, Ls	465uH typ.
DIELECTRIC	5-9 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(5-2):(9-11)	57:1, ±3%

**GENERAL SPECIFICATIONS:**  
OPERATING TEMPERATURE RANGE: -40°C to +125°C.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0622		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.001 [.03]	DRAWING TITLE INDUCTOR	PART NO. FKS750312407
6A	6/11			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750312407	SPECIFICATION SHEET 1 OF 1