

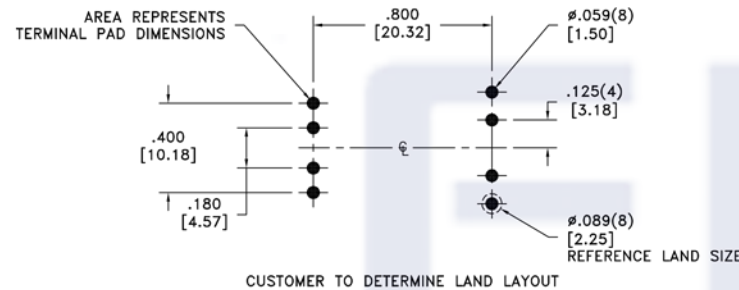




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Au100%	Yes	Yes

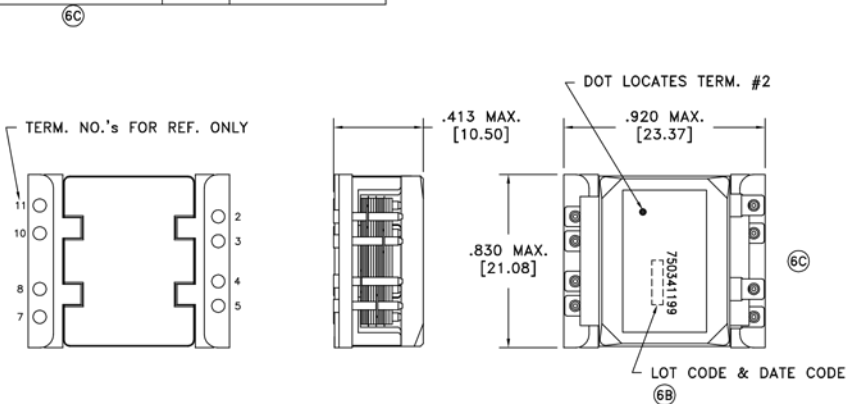

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	7.8 mOhms max.
D.C. RESISTANCE	3-5 @20°C	7.8 mOhms max.
D.C. RESISTANCE	7-10 @20°C	4.5 mOhms max.
D.C. RESISTANCE	8-11 @20°C	4.5 mOhms max.
INDUCTANCE	2-5 tie(3+4), 10kHz, 1.0VAC, Ls	240.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+8+10+11), 100kHz, 100mVAC, Ls	0.500uH max.
DIELECTRIC	2-7 tie(3+4, 8+10), 2250VDC, 1 second	-
URNS RATIO	(3-5):(2-4)	1:1, ±1%
URNS RATIO	(3-5):(7-10)	1.667:1, ±1%
URNS RATIO	(3-5):(8-11)	1.667:1, ±1%

GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-0871		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. FKS750341199
6C	5/14			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
6B	11/12					
6A	7/12					
					eiSos p/n: FKS750341199	 SPECIFICATION SHEET 1 OF 1