





CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Au100%	Yes	Yes



**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	1.5 mOhms max.
D.C. RESISTANCE	7-11 @20°C	1.2 mOhms max.
INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	65.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+11), 100kHz, 100mVAC, Ls	150nH max.
DIELECTRIC	2-7 tie(3+4), 2250VDC, 1 second	-
URNS RATIO	(7-11):(2-4)	1:1, ±1%
URNS RATIO	(7-11):(3-5)	1:1, ±1%

TERM. NO.'s FOR REF. ONLY

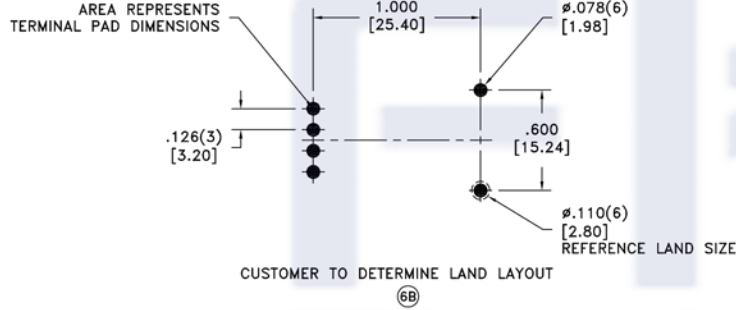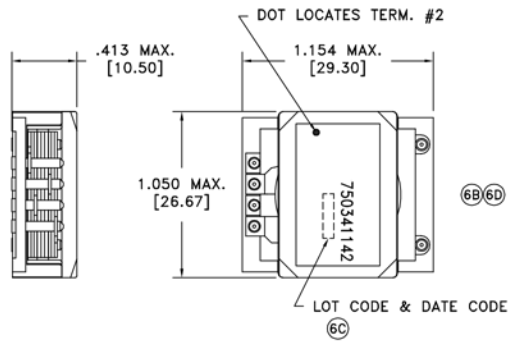

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications
6D	4/14	Method: Tape & Reel
6C	11/12	PKG-0793
6B	4/12	
6A	10/11	

Method: Tape & Reel  
PKG-0793



Tolerances unless otherwise specified:  
Angles: ±1°      Decimals: ±.005 [.13]  
Fractions: ±1/64      Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**

PART NO.

FKS750341142

eiSos p/n: FKS750341142



SPECIFICATION SHEET 1 OF 1